


Chain Fittings



Trident Slim Kenter Shackle R4

DNV-GL Type Approved

In accordance with DNV-OS-E302 Offshore Mooring Chain

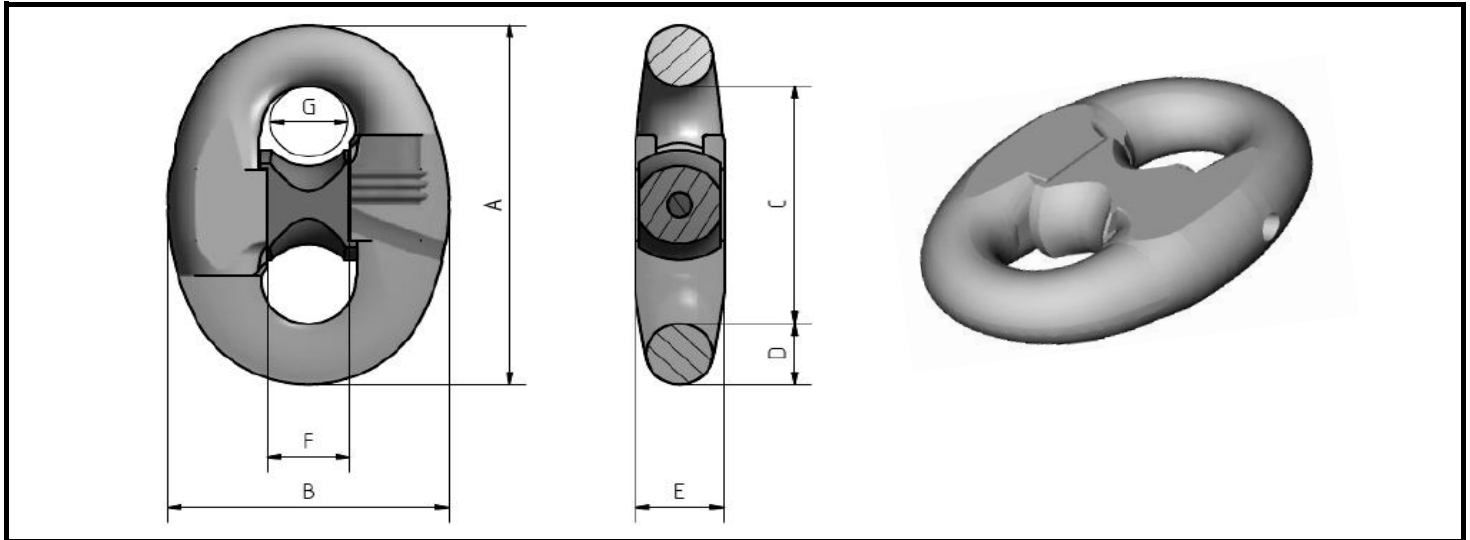

Part No	Chain Size	Grade	PL (kN)	BL (kN)	Dimensions (mm)							Weight (Kg)
					A	B	C	D	E	F	G	
300G470	70	R4	4064	5156	420	294	280	70	92	81	77	58
300G476	76	R4	4731	6001	456	319	304	76	100	87	84	67
300G484	84	R4	5682	7208	504	353	336	84	110	97	92	88
300G489	89	R4	6310	8004	534	374	356	89	117	102	98	99
300G495	95	R4	7096	9001	570	399	380	95	124	109	105	150
300G4102	102	R4	8054	10217	612	428	408	102	134	117	112	168
300G4105	105	R4	8478	10754	630	441	420	105	138	121	116	175
300G4108	108	R4	8909	11301	648	454	432	108	141	124	119	193
3005G4114	114	R4	9791	12420	684	479	456	114	149	131	125	205
300G4117	117	R4	10242	12993	702	491	468	117	153	135	129	219
300G4120	120	R4	10700	13573	720	504	480	120	157	138	132	241
300G4127	127	R4	11789	14955	762	533	508	127	166	146	140	280
300G4133	133	R4	12746	16169	798	559	532	133	174	153	146	322
300G4146	146	R4	14881	18877	876	613	584	146	191	168	161	425
300G4152	152	R4	15890	20156	912	638	608	152	199	175	167	480

Tolerances on Forged Surfaces +/- 2.5% - Tolerances on Machined Surfaces +/- 1% - Tolerances on Crown Area +5% / -0%

Type approved others in progress

Manufactured & Tested in Germany

Can also be supplied in grade R3

The Trident Thin Kenter comes with our 3 tooth locking mechanism superior to the single tooth Kenter

Supplied with DNV-GL Certification as standard.

Other Class Certification available on request, ABS, BV, LR

NOTES:-