



# Chain Fittings




## Ndur Link Thin Kenter Shackle R5 Fastlock

The Benchmark for Kenter Type connecting links

DNV-GL - ABS Type Approved

Offshore accessory for Temporary and Mobile Mooring

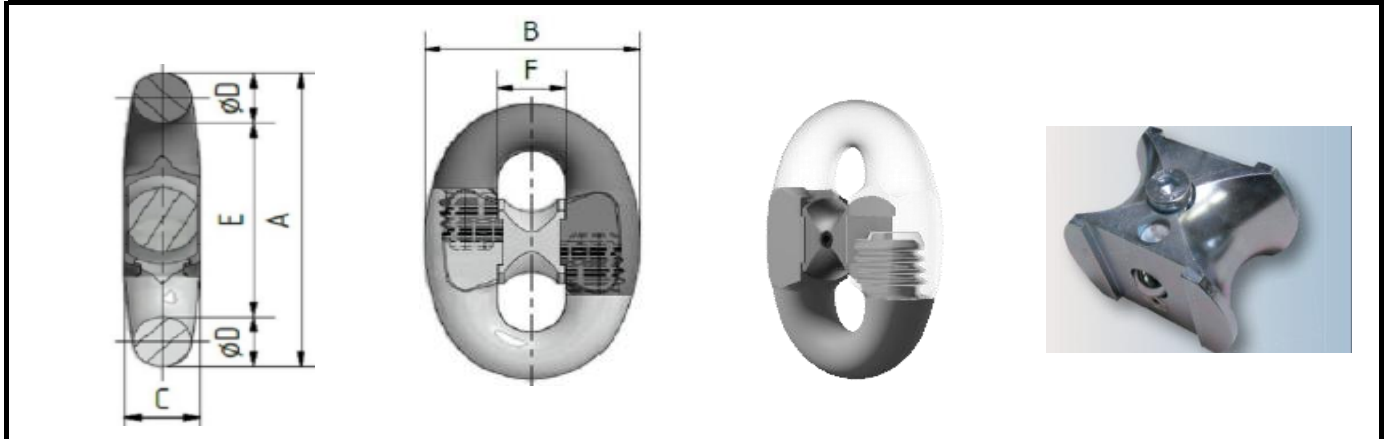

Part No	Chain Size	Grade	PL (kN)	BL (kN)	Dimensions (mm)						Weight (Kg)
					A	B	C	D	E	F	
302NDUR570FL	70	R5	4723	6021	420	294	91	70	280	79	58
302NDUR576FL	76	R5	5498	7009	456	319	99	76	304	86	67
302NDUR584FL	84	R5	6602	8418	504	353	109	84	336	95	88
302NDUR589FL	89	R5	7332	9348	534	374	116	89	356	101	99
302NDUR595FL	95	R5	8246	10512	570	399	124	95	380	107	150
302NDUR598FL	98	R5	8717	11113	588	412	127	98	392	111	155
302NDUR5102FL	102	R5	9359	11932	612	428	133	102	408	115	168
302NDUR5105FL	105	R5	9851	12560	630	441	137	105	420	119	175
302NDUR5108FL	108	R5	10352	13198	648	454	140	108	432	122	193
302NDUR5114FL	114	R5	11378	14506	684	479	148	114	456	129	205
302NDUR5117FL	117	R5	11902	15174	702	491	152	117	468	132	219
302NDUR5120FL	120	R5	12434	15852	720	504	156	120	480	136	241
302NDUR5127FL	127	R5	13700	17466	762	533	165	127	508	144	280
302NDUR5133FL	133	R5	14812	18883	798	559	173	133	532	150	322
302NDUR5146FL	146	R5	17292	22046	876	613	190	146	584	165	425
302NDUR5152FL	152	R5	18464	23540	912	638	198	152	608	172	480

### Manufactured & Tested in Germany

**Application:-** Primarily for the connecting of Mooring Chain, but can also be used for the connection of Swivels, Shackles, Sockets etc. In various configurations.

**Certification:-** Available with DNV-GL, ABS, Lloyd's, and BV


### Features:-

Fastlock Pinless Locking System.  
Greatest Fatigue life for Kenter Type Shackle.  
Parts have been MBL tested up to -40°C

**Sizes:** Other diameters are available on request.

### Low cycle Fatigue Performance

% above required number of cycles as per API 2 SK

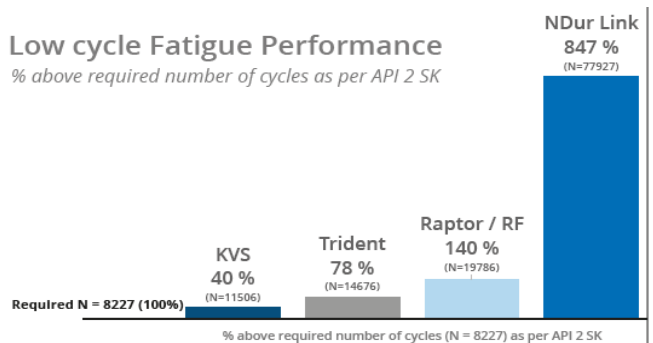

Test KVS, Trident, Raptor/RF: Jahr 2014; Test Ndur Link: Jahr 2016  
Fatigue test carried out on 76 mm R5 Connector. Mean load and amplitude chosen in acc. with API 2 SK

### NOTES:-