Chain Fittings

DACL - Pear Link Shackle

DNV-GL Type Approved

In accordance with DNV-OS-E302 Offshore Mooring Chain

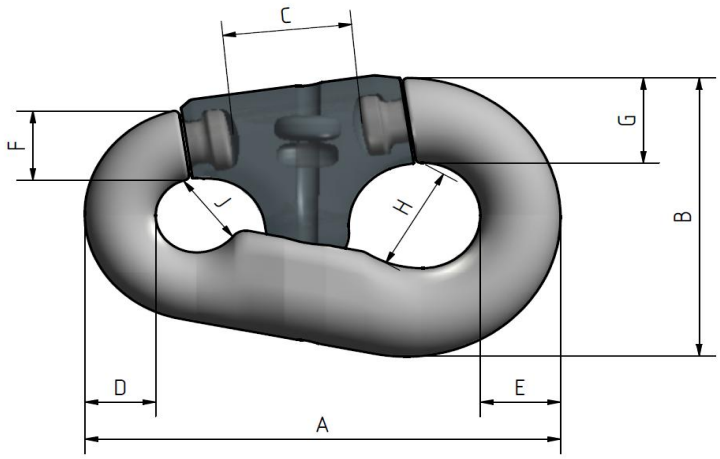

						Dimensions (mm)									
Part Number	No	Chain Size	Grade	PL (kN)	BL (kN)	A	B	C	D	E	F	G	H	J	Weight (Kg)
287G42**	2	19-24	4	524	664	195	115	51	25	33	22	40	58	25	3.5
287G43**	3	25-30	4	809	1026	235	64	33	40	33	47	58	59	40	6.3
287G44	4	32-40	4	1410	1789	298	207	89	41	50	45	60	83	52	12
287G45	5	42-51	4	2243	2845	380	264	100	52	65	60	84	109	65	29
287G46	6	52-60	4	3048	3867	480	337	125	66	83	81	103	142	86	61
287G47	7	62-79	4	5079	6443	570	370	155	85	96	92	113	140	98	100
287G48	8	81-92	4	6699	8497	655	430	162	99	129	119	131	162	115	148
287G410	10	97-106	4	8054	10217	900	580	192	127	168	151	181	207	150	385

Tolerances on Forged Surfaces +/- 2.5% - Tolerances on Machined Surfaces + / - 1% - Tolerances on Crown Area +5% / -0%

Manufactured & Tested in Germany
Supplied with DNV Certification as standard.
Other Class Certification available on request, ABS, BV, LR
Other sizes and grades available on request
**Not Type Approved

NOTES:-
Suitable for connecting of Anchor D Shackle to Chain

Revision: 01 - 07/12/2015