


# Chain Fittings



## DCCL C-Connecting Shackle

DNV-GL Type Approved

In accordance with DNV-OS-E302 Offshore Mooring Chain

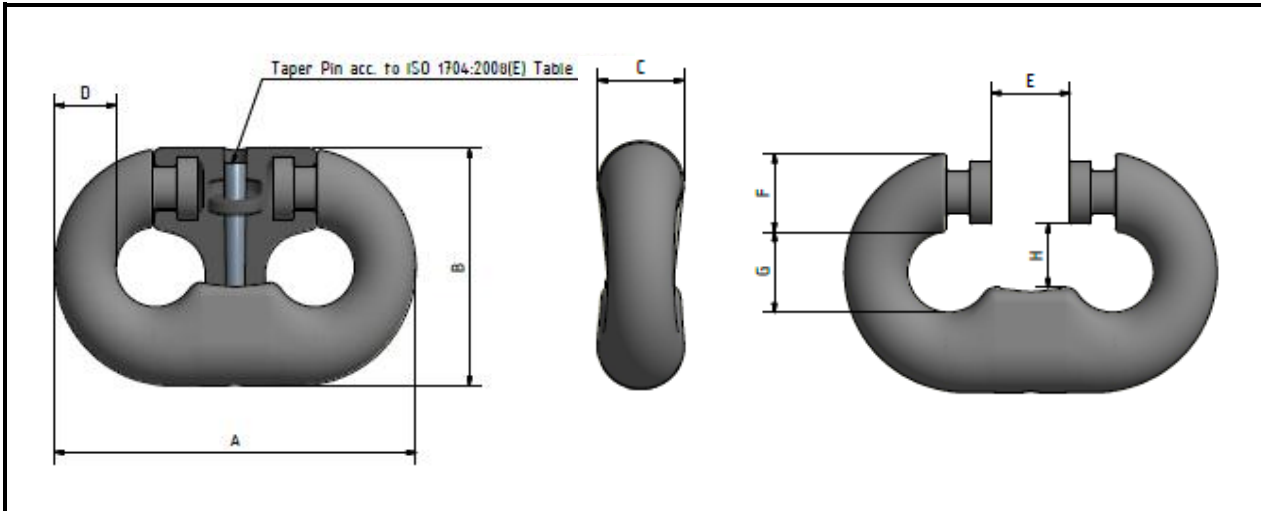

Part Number	Nominal Dia	Chain Size	Grade	PL (kN)	BL (kN)	Dimensions (mm)							
						A	B	C	D	E	F	G	H
289G464	64	62-64	R4	3440	4364	388	247	88	64	74	79	84	74
289G467	67	65-67	R4	3747	4753	407	258	92	67	78	83	88	77
289G470	70	68-70	R4	4064	5156	425	270	97	70	81	87	92	81
289G473	73	71-73	R4	4392	5572	443	281	101	73	85	91	96	84
289G476	76	74-76	R4	4731	6001	461	293	105	76	88	94	100	87
289G479	79	78-79	R4	5079	6443	480	305	109	79	92	98	104	91
289G483	83	81-83	R4	5559	7052	504	320	115	83	97	103	110	95
289G484	84	84-86	R4	5930	7522	522	332	119	86	100	107	114	99
289G489	89	87-89	R4	6310	8004	540	343	123	89	103	110	117	102
289G492	92	90-92	R4	6699	8497	558	355	127	92	107	114	121	106
289G495	95	94-95	R4	7096	9001	577	366	131	95	110	118	125	109
289G498	98	97-98	R4	7501	9515	595	378	135	98	114	122	129	113
289G4100	102	100-102	R4	8054	10217	619	393	141	102	119	126	135	117

Tolerances on Forged Surfaces +/- 2.5% - Tolerances on Machined Surfaces +/- 1% - Tolerances on Crown Area +5% / -0%

Manufactured & Tested in Germany  
 Supplied with DNV Certification as standard.  
 Other Class Certification available on request, ABS, BV, LR  
 Other sizes available on request



NOTES: